

SILTHAUL · PRECIS

SiltHaul design precis

Design Molecule Lab · designmolecule.com

DOCUMENT CONTROL

Document ID	SLH-PRC-001	Version	0.3
Status	Draft	Date	2026-10-03
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/silthaul		
Source	docs/02-concept.md @ uncommitted		

REVISION HISTORY

Version	Date	Author	Change
0.3	2026-10-03	Amish Chadha	TRL 3 figures from SLH-CAL-001 and the constructable design (SLH-DDR-002); split winding drum, shear pin, two-sheave tail block, ramp
0.2	2026-10-03	Amish Chadha	TRL 2 precis; how it works, components, first-order numbers, key design choices (SLH-DDR-001), safety
0.1	2026-09-30	Amish Chadha	Initial scaffold


SiltHaul design precis

Drags flood mud out of homes, lanes and drains with a hand-capstan scraper instead of shovels and buckets.

SiltHaul

github.com/BoujeeEnjinia1701/silthaul

CONCEPT, NOT FOR FABRICATION

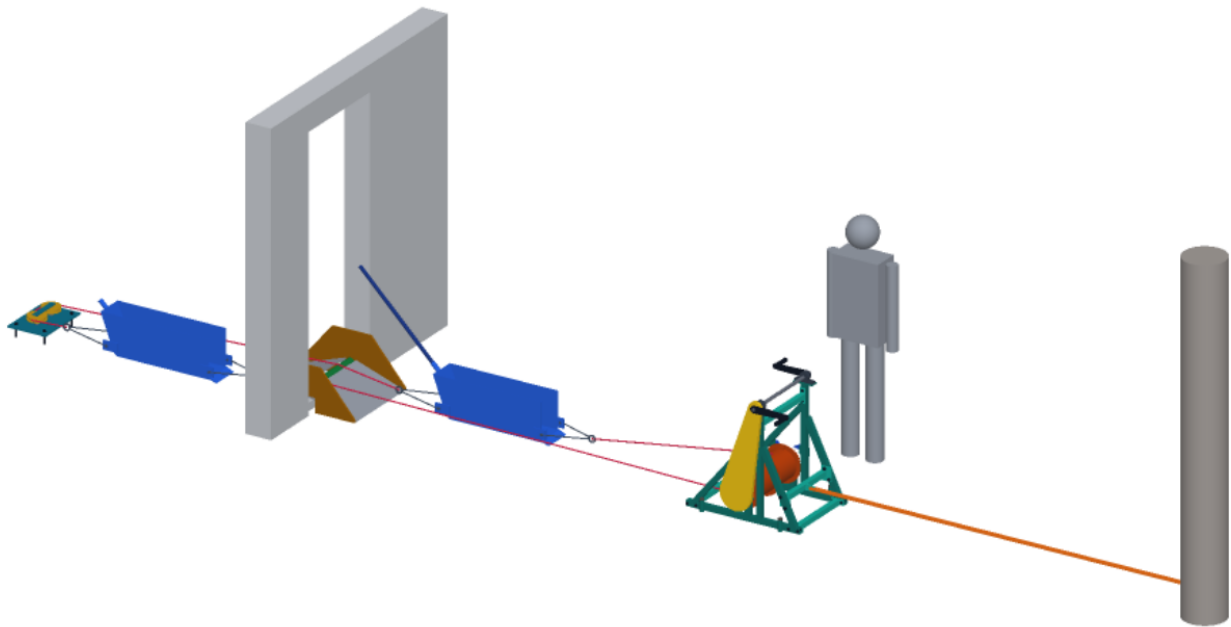

Seen from the front right and above, 24 deg elevation. Grey: Wall, doorway and threshold (site), Tree used as the anchor (site), Person, 1.75 m (scale) for scale

Figure 1. Concept render: tail sheave block and scraper box in the room, ramp in the doorway, hand capstan outside with a sling to a tree (layout shortened).

■ Summary

SiltHaul is a hand-powered slusher for flooded buildings. Two steel scraper boxes, each 210 mm wide and holding about 40 L, are tied into a rope loop that runs from a hand capstan outside, through the doorway, round a tail sheave block anchored to the floor at the far end of the room, and back. Cranking one way drags one loaded box out through the door to a dump point while the other comes back empty; cranking the other way swaps them, so mud goes out on every stroke (SLH-DDR-003). Two people at the cranks need 63 N each; nobody lifts or carries mud out of the building. The design is constructable, its frame packs flat, its parts cost about USD 1,056 against a USD 2,000 value-engineering target, and its heaviest lift is 23.1 kg. On paper it moves about 0.51 m³ an hour with a crew of four and a rest allowance, 0.57 times a bucket crew (SLH-CAL-001).

■ How it works

1. **Set up.** The capstan stands outside, at least 6 m beyond the door and in line with it, held back by a round sling to a tree or a parked vehicle and kept from skating by four stakes. The tail sheave block is bolted to the concrete floor at the far end of the room with four M12 anchors. A ramp straddles the threshold.
2. **The loop.** The pull rope runs from the lower side of the drum's pull half, over the ramp roller, to the box's front bridle. The return rope runs from the box's rear bridle to the tail block, round its two sheaves and back beside the box, 300 mm to one side, over the ramp roller to the top of the drum's return half.
3. **Haul.** Cranking winds the pull rope onto one half of the drum while the other half pays out the return rope at the same rate, so the loop stays the same length. The box's open front, which faces the door, scoops mud as it goes; workers also shovel or push mud into it.
4. **Dump.** The box stops at a dump point outside. A pawl holds the drum. Two people lift the loose tipping bar, which drops into a socket on the back, and the box rolls forward over its lip and empties.
5. **Return.** The other pawl is chosen and the cranks turned the other way. The sloped back rides over the mud as the empty box is pulled back.

■ Main components

Table 1. Components (numbers are BOM lines).

#	Component	What it is
1	Capstan frame	Flat-pack, 40 mm square tube: two welded side frames (890 x 814 mm, 9.2 and 9.6 kg) with bearing pads, stake tubes and pawl brackets, joined by four bolted cross members including an anchor bar and eye at drum height
2	Winding drum	219.1 mm tube in two halves of 21 turns each, on a 30 mm shaft, with a 48-tooth sprocket and two opposite ratchet wheels; 19.0 kg
3, 4	Bearings	UCP206 pillow blocks for the drum, UCP205 for the crank shaft
5	Crank shaft and cranks	25 mm shaft 850 mm up, two 250 mm cranks set 180 degrees apart
6, 7	Chain drive	ISO 08B-1 chain, 12 to 48 teeth, 4:1
8	Pawls	Two, one for each direction
9	Chain guard	Closed 1.5 mm sheet guard round the chain and sprockets
10	Shear pin	4 mm S235 pin in the small sprocket hub; limits rope tension to about 2.5 kN
11, 12	Outside anchor set	Four stakes and a 2,000 kg round sling with shackles
13 to 15	Tail sheave block	10 mm floor plate with two 125 mm sheaves on 25 mm pins, a keeper bar and four M12 floor anchors
16	Ropes	10 mm polyester double braid, 18 kN: a 17 m pull rope and a 38 m return rope
17, 18, 20	Scraper box	2 mm steel box with a bevelled lip, skids, sloped back, bridle lugs, bridles and a loose tipping bar
19	Doorway ramp	Plywood cheeks, steel decks and a crest roller; fits 0.7 m doors and 110 mm thresholds
22	Stop signal and briefing card	Hand signals, whistles and the stop rule

■ Numbers from the TRL 3 calculations

Table 2. Key figures (SLH-CAL-001).

Quantity	Value
Full box	40.3 L, 86 kg with mud at 1.7 kg/L; two boxes
Haul pull	970 N estimated for a full box out and the empty one back; 1,000 N working pull
Crank force	63 N each with two people; 126 N for one
Rope speed	5.4 m/min
Stroke over 11 m	3.54 min; 17 strokes and 0.68 m³ an hour (0.51 with rest)
Overload limit	Shear pin releases at about 2,450 N; all parts sized on 3,000 N
Rope	Factor 18 on the working pull, 5.4 on the limit
Tail block	0.45 of recommended anchor loads at the limit
Heaviest lift	Drum with bearings 23.1 kg; box 16.1 kg
Cost	Value-engineering target: USD 2,000. Estimated cost of the constructable design: USD 1,055.60 (USD 944.40 under the target)

SiltHaul: energy per 11 m stroke: one full 40 L box out, the empty box back, kJ (SLH-CAL-001 estimates)

github.com/BoujeeEnjinia1701/silthaul

CONCEPT, NOT FOR FABRICATION

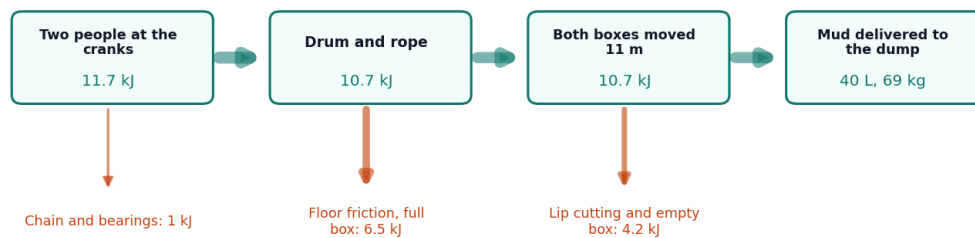


Figure 2. Energy for one 11 m haul of a full box (estimates): most of what the crank crew puts in goes to dragging the box over the floor.

■ Key design choices

All decided on 2026-10-03 under Amish's pre-approval (SLH-DDR-001 and SLH-DDR-002):

- **Split winding drum, not a friction capstan.** A loop on a friction drum needs a pretension of about half the pull and its turns walk along the drum. A drum whose halves wind and unwind together cannot slip and keeps the loop length constant.
- **Overload limit by shear pin.** Without it a jammed box and two people heaving could put 6.4 kN into the rope. With it every part is sized on 3,000 N.
- **Two ratchet wheels on the drum shaft.** The drum is held in either direction, even if the chain or pin fails.
- **A box on each leg.** Two boxes 210 mm wide on lines 300 mm apart pass each other in the room and both cross the ramp in a 0.7 m door, so mud goes out on every stroke (SLH-DDR-003).

- **Open front facing the door.** The box scoops on the way out and keeps its load against its back; it tips forward over its lip at the dump, like a Fresno scraper.
- **Tail block on drilled floor anchors only.** No reliance on walls or door frames; a room without a sound slab is not worked with SiltHaul.
- **Sling at drum height.** The anchor eye is 200 mm up so the rope and the sling pull in line and the capstan cannot tip.

■ Patent design-arounds

From the preliminary patent, trademark and prior-art screen (not legal advice):

- Slusher patents US2588657A and US3532170A have expired and are free prior art; the Fresno scraper's forward-tipping bowl is nineteenth-century prior art.
- WO2017216731A1 (Sulzer scraper winch) is shown as ceased on Google Patents; a South African family member (ZA201808475B) is listed and should be confirmed before release. SiltHaul uses a hand-cranked split drum, not motor-driven drums.
- Watch item from the preliminary screen: tail-sheave anchor on weak, wet walls. The tail block has its own floor anchors and never bears on a wall.

■ Relationship to other lab projects

- **Hand capstan common block.** SiltHaul's capstan is recorded as the candidate common block for SaltDrag; SaltDrag is checked against it when it reaches TRL 3 (not edited here).
- **CalRig.** The first candidate rig for the proof loads of the anchors, rope and capstan.

■ Safety

Safety: Published as an open engineering reference, not certified equipment. Users are responsible for their own risk assessment.

Rope under tension. A failed anchor, shackle or rope can whip. Nobody stands in the line of a rope, inside the loop, or beside a sheave or the ramp while the cranks turn. The shear pin limits rope tension to about 2.5 kN; never replace it with a stronger pin or a bolt.

Moving machinery. The chain and sprockets are fully guarded; never turn the cranks with the guard off. Keep hands clear of the drum and rope where it winds on. Choose the pawl before letting go of the cranks.

Anchors. Every anchor, the rope and the capstan are proof-loaded before first use and the rope, splices, shackles and anchors are inspected each day. The tail block is used only on a sound concrete slab; the sling runs level or rises 10 degrees at most.

Dumping. Two people lift the tipping bar, only when the cranks are stopped and a pawl is holding.

The building and the mud. Check the building for structural damage and switch off electricity before work starts. Flood mud may carry sewage and disease; users need boots, gloves and hygiene measures, and should follow local health advice.

Stop rule. One signaller, a whistle and the card's hand signals. One blast stops the cranks; nobody enters the rope area until the signaller says so.

■ Open questions

None for the design. Questions about mud, floors and people are for the first trials: how the box fills and drags in liquid slurry and stiff clay, how often the slab is sound enough for the tail anchors, and the real bucket-crew rate for R1.